



ComAnt[®] Communications Antennas

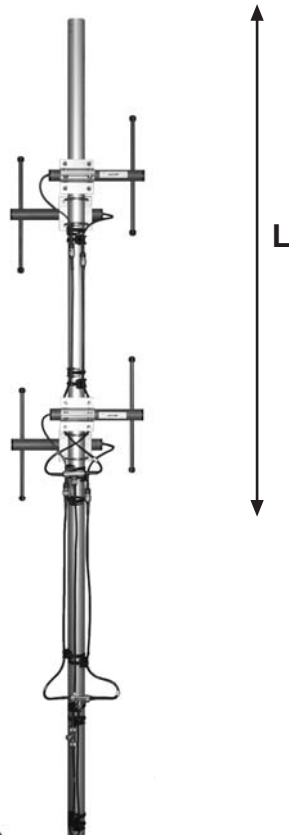

FREQUENCY INDEPENDENT DATA

Description: bidirectional stacked broadside
Frequency: 135-145 MHz, 144-156 MHz,
154-166 MHz, 163-177 MHz,
221-239 MHz, 365-395 MHz,
380-410 MHz, 405-440 MHz,
440-475 MHz,
Impedance: 50 ohm
Gain: 9 dBi
Polarization: vertical/horizontal
Connector: N-female/TNC-female
VSWR: < 1.5
Radome: UV resistant ABS, RAL 7012,
PU foam filling
Radiator: copper
Attachment: Ø 35-60 mm, aluminium alloy
bracket, stainless steel V-
bolts and self locking nuts
Lightning protection: DC-short circuited
Temperature: -40° - +80° C
IP: 67

RADIATION PATTERN



CAB4 BIDIRECTIONAL STACKED BROADSIDE